


**NORMA: DIN 6797 A**
OZUBENÉ PODLOŽKY-VNĚJŠÍ OZUBENÍ
TOOTHED LOCK WASHERS EXTERNAL TEETH

Materiál: Pružinová ocel, nerez A2

Povrchová úprava: Bez povrchové úpravy, zinek

Pevnost: 4.6

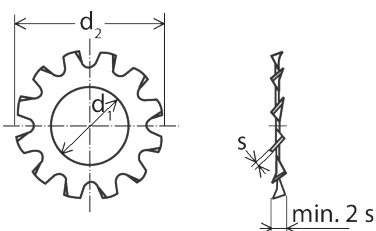


M	d1 min	d2 max	s
M 2	2,2	4,5	0,3
M 2,3	2,5	5	0,4
M 2,5	2,7	5,5	0,4
M 3	3,2	6	0,4
M 3,5	3,7	7	0,5
M 4	4,3	8	0,5
M 5	5,3	10	0,6
M 6	6,4	11	0,7
M 8	8,4	15	0,8
M 10	10,5	18	0,9
M 12	13	20,5	1
M 14	15	24	1
M 16	17	26	1,2
M 18	19	30	1,4
M 20	21	33	1,4

NORMA: DIN 6797 J
OZUBENÉ PODLOŽKY-VNITŘNÍM OZUBENÍM
TOOTHED LOCK WASHERS INTERNAL TEETH

Materiál: Pružinová ocel, nerez A2

Povrchová úprava: Bez povrchové úpravy zinek

Pevnost: 4.6

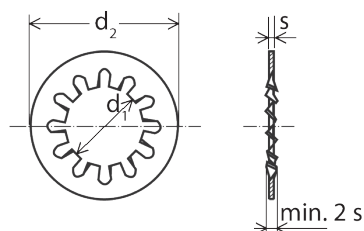

M	d1 min	d2 max	s
M 2	2,2	4,5	0,3
M 2,3	2,5	5	0,4
M 2,5	2,7	5,5	0,4
M 3	3,2	6	0,4
M 3,5	3,7	7	0,5
M 4	4,3	8	0,5
M 5	5,3	10	0,6
M 6	6,4	11	0,7
M 8	8,4	15	0,8
M 10	10,5	18	0,9
M 12	13	20,5	1
M 14	15	24	1
M 16	17	26	1,2
M 18	19	30	1,4
M 20	21	33	1,4

