




NORMA: DIN 1474

NÁSUVNÉ RÝHOVANÉ KOLÍKY
GROOVED PINS,
HALF LENGTH REVERSE GROOVED

Materiál: Ocel, nerez - A2

Povrchová úprava: Bez povrchové úpravy

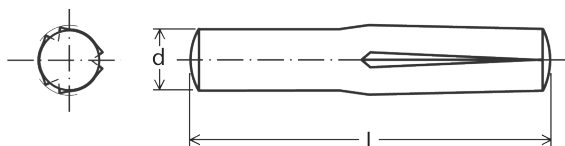

d	2	2,5	3
c ≈	0,25	0,3	0,4
Tol. vrtání	H9		

d	4	5	6	8	10
c ≈	0,5	0,63	0,8	1	1,2
Tol. vrtání	H11				


d	l	d	l	d	l	d	l
2	6	3	8	4	20	6	25
2	8	3	10	5	10	8	16
2	10	3	12	5	12	8	20
2	12	3	16	5	16	8	25
2,5	8	3	20	5	20	10	20
2,5	10	4	10	6	12	10	25
2,5	12	4	12	6	16	10	30
2,5	16	4	16	6	20		

NORMA: DIN 1475

RÝHOVANÉ KOLÍKY S RUKOJETÍ
GROOVED PINS,
THIRD LENGTH CENTER GROOVED

Materiál: Ocel, nerez - A2

Povrchová úprava: Bez povrchové úpravy

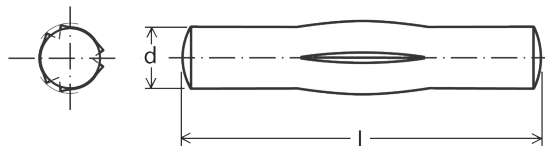

d1	1,5	2	2,5
c ≈	0,2	0,25	0,3
Tol. vrtání	H9		

d1	3	4	5	6	8
c ≈	0,4	0,5	0,6	0,8	1
Tol. vrtání	H11				

d1	l	d1	l	d1	l	d1	l
1,5	8	3	30	5	25	8	25
1,5	10	3	35	5	30	8	30
1,5	12	3	40	5	35	8	35
2	12	4	20	5	40	8	40
2	16	4	25	5	50	8	45
2	20	4	30	6	25	8	50
3	12	4	35	6	30	8	60
3	(14)	4	40	6	35	8	80
3	16	4	45	6	40		
3	20	4	50	6	45		
3	25	5	20	6	50		

